

CONDUIT REDUCER BUSHINGS FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To reduce the trade size of a tapered entry on a conduit fitting.

FEATURES:

- Threaded for rigid conduit and IMC.
- Made with rolled edge, protects wire insulation.

STANDARD MATERIALS:

Steel


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated

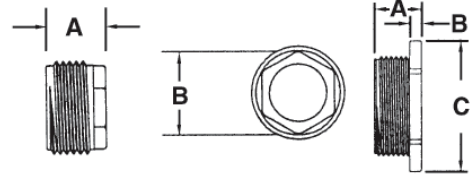

TYPE CR1

Flush Type

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
CR0	1/2" x 3/8"	0.638	0.908	—	—	200	3	80007
CR1	3/4" x 1/2"	0.650	0.930	—	—	200	4	80017
CR2	1" x 1/2"	0.715	1.125	—	—	100	13	80027
CR3	1" x 3/4"	0.715	1.125	—	—	100	8	80037
CR4	1-1/4" x 1/2"	0.820	1.470	—	—	50	29	80047
CR5	1-1/4" x 3/4"	0.820	1.470	—	—	50	22	80057
CR6	1-1/4" x 1"	0.810	1.470	—	—	50	14	80067
CR7	1-1/2" x 1/2"	0.850	1.700	—	—	50	38	80077
CR8	1-1/2" x 3/4"	0.850	1.700	—	—	50	32	80087
CR9	1-1/2" x 1"	0.850	1.700	—	—	50	24	80097
CR10	1-1/2" x 1-1/4"	0.850	1.700	—	—	50	12	80107
CR11	2" x 1/2"	0.970	2.230	—	—	25	45	80117
CR12	2" x 3/4"	0.970	2.230	—	—	25	68	80127
CR13	2" x 1"	0.970	2.230	—	—	25	54	80137
CR14	2" x 1-1/4"	0.970	2.230	—	—	25	44	80147
CR15	2" x 1-1/2"	0.970	2.230	—	—	25	31	80157

