

STEEL RAINLIGHT EMT COMPRESSION CONNECTORS FOR EMT CONDUIT

APPLICATION:

- Compression-style connector with internal sealing ring and knockout gasket to create a raintight seal when connecting EMT to box or enclosure.
- The design prevents water seepage into conduit, box or enclosure.

FEATURES:

- The only steel compression fitting, UL Listed Raintight.
- All steel construction with zinc plated finish for corrosion resistance.
- Distinct blue gland nut provides quick raintight identification.
- Unique raised bump design affords fast, positive locking of compression nuts.
- Gasket on male hub NPSM threads of box connector seals installation for raintight connection between the box and the connector.
- Angled teeth on steel locknut for secure bite into enclosure.
- Heavy steel walls.
- Raintight.
- Concrete tight.

STANDARD MATERIALS:

Steel


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES




PATENTED
UL LISTED E308075
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Raintight
Concrete tight

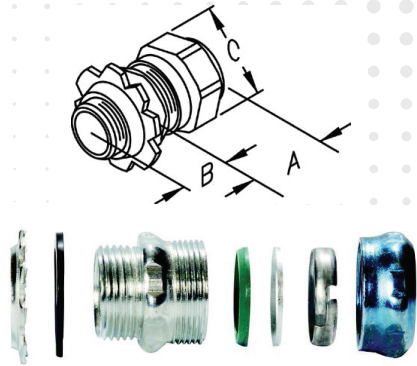

TYPE S1011RT

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
S1010RT	1/2"	1/2"	1.040	0.034	1.120	50	500	11	62201
S1011RT	3/4"	3/4"	1.040	0.043	1.390	25	250	17	62202
S1012RT	1"	1"	1.050	0.052	1.700	50	200	23	62203
S1013RT	1-1/4"	1-1/4"	1.270	0.062	2.050	25	100	41	62204
S1014RT	1-1/2"	1-1/2"	1.400	0.064	2.250	10	40	50	62205
S1015RT	2"	2"	1.520	0.066	2.780	5	20	67	62206
S1015DRT	2-1/2"	2-1/2"	2.510	0.083	3.600	—	12	177	62311
S1015ERT	3"	3"	2.540	0.083	4.260	—	12	234	62312
S1015E1RT	3-1/2"	3-1/2"	2.720	0.087	4.710	—	6	288	62313
S1015FRT	4"	4"	2.890	0.090	5.210	—	6	343	62314

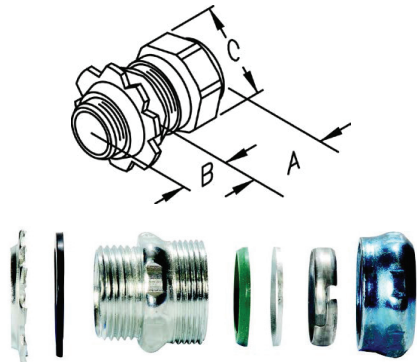

TYPE S4061RT

Insulated Throat

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
S4060RT	1/2"	1/2"	1.040	0.034	1.120	50	500	11	62301
S4061RT	3/4"	3/4"	1.040	0.043	1.390	25	250	17	62302
S4062RT	1"	1"	1.050	0.052	1.700	50	200	23	62303
S4063RT	1-1/4"	1-1/4"	1.270	0.062	2.050	25	100	41	62304
S4064RT	1-1/2"	1-1/2"	1.400	0.064	2.250	10	40	50	62305
S4065RT	2"	2"	1.520	0.066	2.780	5	20	67	62306
S4065DRT	2-1/2"	2-1/2"	2.510	0.083	3.600	—	12	177	62307
S4065ERT	3"	3"	2.540	0.083	4.260	—	12	234	62308
S4065E1RT	3-1/2"	3-1/2"	2.720	0.087	4.710	—	6	288	62309
S4065FRT	4"	4"	2.890	0.090	5.210	—	6	343	62310

