

ZINC CABLE AND CONDUIT CONNECTORS

FOR ARMORED CABLE, METAL CLAD AND FLEXIBLE METALLIC CONDUIT

APPLICATION:

- To terminate armored cable in a 1/2" knockout in a dry location box or enclosure.

FEATURES:

- Furnished with die cast locknuts.
- Tri-combo head screws.



STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E309514
CSA File No. LR57925
UL Standard: UL514B
NEMA FB-1
ASTM Rated

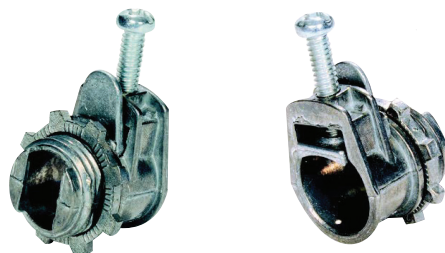

TYPE C920

Saddle Type

CATALOG NUMBER	TRADE SIZE	DIM A MIN	DIM A MAX	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C920	3/8"	0.12	0.63	0.98	50	500	8	13512

Please see Cable Chart for Cable Connectors on page 182.

COMBINATION COUPLINGS

FOR FLEX METAL CONDUIT TO RIGID OR IMC CONDUIT

APPLICATION:

- To connect flexible metal conduit to rigid or IMC conduit.

FEATURES:

- Rigid conduit to Flex.
- Female hub threads – NPT.

STANDARD MATERIALS:

Malleable Iron


STANDARD FINISH:

Zinc Plated

CERTIFICATION AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 23E

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
23E	3/4"	1.38	1.75	1.88	20	200	19	55231
24E	1"	1.63	1.81	2.31	20	100	32	55241
25E	1-1/4"	2.00	2.31	2.62	—	20	36	55251