

ZINC CABLE AND CONDUIT FITTINGS FOR NON-METALLIC SHEATHED CABLE

APPLICATION:

- Used to join 1/2" steel EMT to 12-2 non-metallic sheathed cable.

FEATURES:

- Assembled with tri-combo screws.



STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Concrete tight when taped

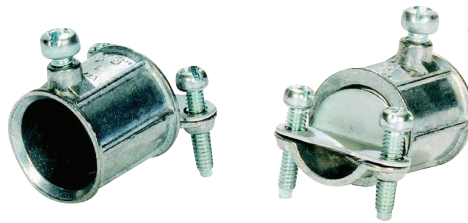

TYPE 170C

Combination Couplings

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
*170C	1/2" EMT - 3/8" Flex	1.28	1.14	50	500	8	51702

* EMT to NM Cable
Please see Cable Chart for Cable Connectors on Page 194.

APPLICATION:

- Used to connect underground feeder cables to enclosures in wet locations.

FEATURES:

- Assembled with a rubber grommet and steel washer.


STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Concrete tight when taped



TYPE UF10

Underground Feeder Connectors (UF) for Service Entrance Cable and Non-Metallic Sheathed Cable

CATALOG NUMBER	TRADE SIZE	TYPE	MINIMUM WIRE SIZE		MAX. WIRE SIZE GROM. OPENING		UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
			A	B	A	B				
UF10	1/2"	12-2	0.100	0.475	0.220	0.440	25	250	17	49899
UF20	3/4"	12-3	0.175	0.800	0.220	0.660	25	250	26	49900

Please see Cable Chart for Cable Connectors on Page 194.