

ENTRANCE HEADS

FOR THREADED RIGID CONDUIT, IMC, PVC AND EMT CONDUIT

APPLICATION:

- For outlet boxes and hubs.

FEATURES:


- Water-resistant design.

STANDARD MATERIALS:

PVC

CERTIFICATIONS AND COMPLIANCES

UL Standard: UL514B
NEMA FB-1
ASTM Rated

**TYPE NS11**

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
NS9	3-#8,6,4,2	2.75	2.50	—	50	28	34096
NS11	3-#3/0 - 4/0	4.25	4.81	—	10	70	34116

APPLICATION:

- Used with Type U service entrance cable.

FEATURES:

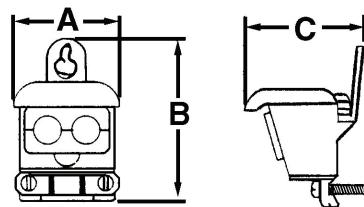
- Removable cap and two-piece insulator make wire pulling and assembly easy.

STANDARD MATERIALS:

Aluminum

CERTIFICATIONS AND COMPLIANCES

UL LISTED E198257
UL Standard: UL514B
NEMA FB-1
ASTM Rated

**TYPE NS7A****Service Entrance Heads**

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
NS2	3-#8 to 3-#1	2.06	2.97	2.26	—	50	26	34025
NS7A	1/0 - 4/0	3.18	4.52	3.60	—	10	31	34175