

FS AND FD DEVICE BOXES – SINGLE GANG FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Accommodates wiring devices and provides opening to splice, tap or pull conductors.

FEATURES:

- Tapered threaded hubs (NPT) with integral bushing.
- Internal grounding screw.
- Suitable for use in wet locations when used with gasketed covers.
- Surface mounting lug.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Zinc Plated


CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated


OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix "G" to Malleable Iron catalog number. Example FD-50G. See Page 17.

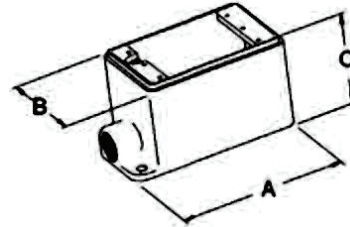

TYPE FD-50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
FS-50	1/2"	5.250	2.938	2.125	1	5	221	90116
FS-75	3/4"	5.250	2.938	2.125	1	5	233	90117
FS-100	1"	5.250	2.938	2.125	1	5	242	90118
FD-50	1/2"	5.250	3.000	2.875	1	5	272	90119
FD-75	3/4"	5.250	3.000	2.875	1	5	278	90120
FD-100	1"	5.250	3.000	2.875	1	5	283	90121

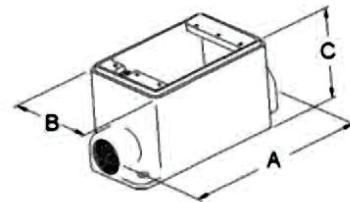

TYPE FSC-50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
FSC-50	1/2"	6.063	2.938	2.125	1	5	234	90122
FSC-75	3/4"	6.063	2.938	2.125	1	5	240	90123
FSC-100	1"	6.063	2.938	2.125	1	5	250	90124
FDC-50	1/2"	6.063	3.000	2.875	1	5	293	90125
FDC-75	3/4"	6.063	3.000	2.875	1	5	305	90126
FDC-100	1"	6.063	3.000	2.875	1	5	313	90127

