

MALLEABLE IRON INSULATED BUSHINGS FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Used with a locknut to terminate threaded/threadless rigid and IMC conduit to a box or enclosure, and to provide a smooth pulling surface. Thermoplastic liner prevents damage to wire insulation. Liner rated at 150°C.

FEATURES:

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes.

STANDARD MATERIALS:


Malleable Iron

STANDARD FINISH:

Zinc Plated

OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix "G" to Malleable Iron Catalog Number. Example 1206G. For more information, see page 23.

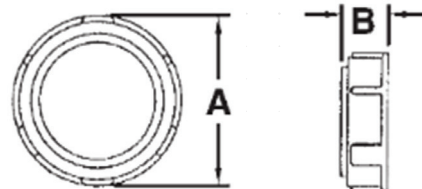

TYPE 1206

For Threaded Rigid Conduit and IMC

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
1206	1/2"	1.19	0.50	100	1000	6	12061
1207	3/4"	1.44	0.56	100	500	9	12071
1208	1"	1.75	0.63	50	500	13	12081
1209	1-1/4"	2.13	0.75	25	250	17	12091
1210	1-1/2"	2.31	0.88	25	250	21	12101
1211	2"	2.81	0.94	—	25	25	12111
1212	2-1/2"	3.38	1.00	—	25	51	12121
1213	3"	4.06	1.13	—	25	66	12131
1214	3-1/2"	4.50	1.19	—	25	72	12141
1215	4"	5.19	1.31	—	25	103	12151
1216	5"	6.06	1.31	—	10	147	12161
1217	6"	7.15	1.31	—	10	184	12171

Also available with lay-in lugs. See pages 81 and 82.

