

MALLEABLE IRON WATERTIGHT CONDUIT HUBS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- General purpose fitting.
- Insulated throat form with bonding screw.

FEATURES:

- Male thread type.
- Tapered female thread for rigid conduit and IMC.
- Recessed O-ring seal ensures watertight and dusttight connections.
- Insulated throat and bonding locknut is suitable for service entrance application.
- Suitable for use in hazardous locations as follows: Class I, Div. 2 Class II, Div. I, 2 Class III, Div. I, 2 Per NEC 501-4 (b), 502-4 (a), 503-3 (a).


MATERIAL/FINISH:

Malleable Iron/Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated

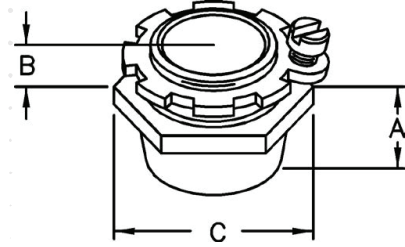

TYPE CHM50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
CHM50	1/2"	0.813	0.625	1.500	25	250	18	70870
CHM75	3/4"	0.938	0.625	1.813	25	250	25	70871
CHM100	1"	1.063	0.750	2.063	10	100	39	70872
CHM125	1-1/4"	1.250	0.750	2.625	5	25	54	70873
CHM150	1-1/2"	1.250	0.813	3.125	2	20	64	70874
CHM200	2"	1.250	0.813	3.563	2	20	98	70875
CHM250	2-1/2"	1.625	1.188	4.125	—	10	196	70876
CHM300	3"	1.750	1.250	4.938	—	5	282	70877
CHM350	3-1/2"	1.813	1.313	5.750	—	5	351	70878
CHM400	4"	1.938	1.375	6.188	—	5	395	70879
CHM500	5"	2.063	1.438	7.625	—	1	717	70880
CHM600	6"	2.125	1.563	8.813	—	1	888	70881

MALLEABLE IRON/HOT DIPPED GALVANIZED WATERTIGHT CONDUIT HUBS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- General purpose fitting.
- Insulated throat form with bonding screw.

FEATURES:

- Male thread type.
- Tapered female thread for rigid conduit and IMC.
- Recessed O-ring seal ensures watertight and dusttight connections.
- Insulated throat and bonding locknut is suitable for service entrance application.
- Suitable for use in hazardous locations as follows: Class I, Div. 2 Class II, Div. I, 2 Class III, Div. I, 2 Per NEC 501-4 (b), 502-4 (a), 503-3 (a).

MATERIAL/FINISH:

Malleable Iron

STANDARD FINISH:


Hot Dipped Galvanized/Zinc Plated



CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated

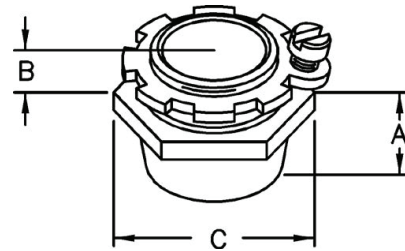

TYPE CHM50G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
CHM50G	1/2"	0.813	0.625	1.500	25	250	18	70910
CHM75G	3/4"	0.938	0.625	1.813	25	250	25	70911
CHM100G	1"	1.063	0.750	2.063	10	100	39	70912
CHM125G	1-1/4"	1.250	0.750	2.625	5	25	54	70913
CHM150G	1-1/2"	1.250	0.813	3.125	2	20	64	70914
CHM200G	2"	1.250	0.813	3.563	2	20	98	70915
CHM250G	2-1/2"	1.625	1.188	4.125	—	10	196	70916
CHM300G	3"	1.750	1.250	4.938	—	5	282	70917
CHM350G	3-1/2"	1.813	1.313	5.750	—	5	351	70918
CHM400G	4"	1.938	1.375	6.188	—	5	395	70919
CHM500G	5"	2.063	1.438	7.625	—	1	717	70920
CHM600G	6"	2.125	1.563	8.813	—	1	888	70921

