

# MALLEABLE IRON/HOT DIPPED GALVANIZED WATERTIGHT CONDUIT HUBS

FOR THREADED RIGID CONDUIT AND IMC

## APPLICATION

General Purpose Fitting.  
Insulated Throat form with Bonding Screw.

## FEATURES

- Male thread type
- Tapered female thread for rigid conduit and IMC
- Recessed O-ring seal assures watertight and dust tight connections.
- Insulated throat and bonding locknut is suitable for service entrance application.
- Suitable for use in hazardous locations as follows: Class I, Div. 2 Class II, Div. I, 2 Class III, Div. I, 2 Per NEC 501-4 (b), 502-4 (a), 503-3 (a)

## MATERIAL/FINISH


Malleable Iron

## STANDARD FINISH

Hot Dipped Galvanized/Zinc Plated

## OPTIONAL FINISH

For Malleable Iron / Zinc Plated, please remove suffix 'G' from Hot Dipped Galvanized Catalog Number and see page 72.

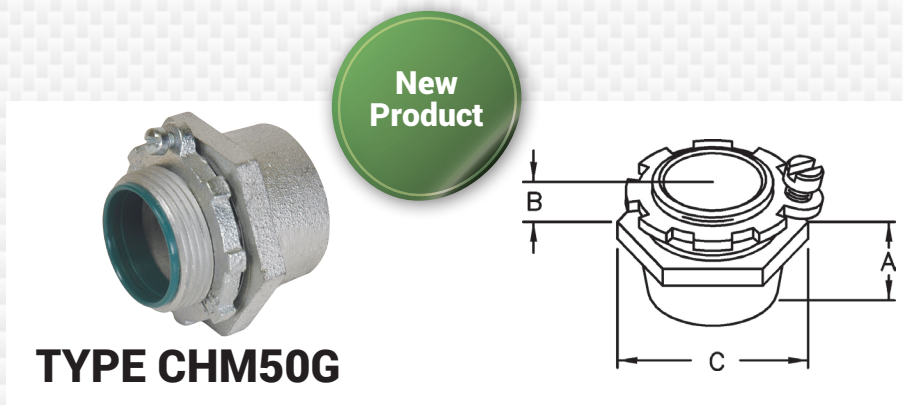

**TYPE CHM50G**

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC #
CHM50G	1/2"	0.813	0.625	1.500	25	250	18	70910
CHM75G	3/4"	0.938	0.625	1.813	25	250	25	70911
CHM100G	1"	1.063	0.750	2.063	10	100	39	70912
CHM125G	1-1/4"	1.250	0.750	2.625	5	25	54	70913
CHM150G	1-1/2"	1.250	0.813	3.125	2	20	64	70914
CHM200G	2"	1.250	0.813	3.563	2	20	98	70915
CHM250G	2-1/2"	1.625	1.188	4.125	-	10	196	70916
CHM300G	3"	1.750	1.250	4.938	-	5	282	70917
CHM350G	3-1/2"	1.813	1.313	5.750	-	5	351	70918
CHM400G	4"	1.938	1.375	6.188	-	5	395	70919

# MALLEABLE IRON/HOT DIPPED GALVANIZED 3-PIECE COUPLINGS

## APPLICATION

Used to join two lengths of threaded conduit.

## FEATURES

- Threaded (NPS) for rigid conduit and IMC
- Concrete tight

## STANDARD MATERIALS

Malleable Iron

## STANDARD FINISH

Hot Dipped Galvanized/Zinc Plated



## OPTIONAL FINISH

For Malleable Iron / Zinc Plated, please remove suffix 'G' from Hot Dipped Galvanized Catalog Number and see page 76.



**TYPE 1023G**

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC #
1022G	1/2"	1.38	1.36	1.36	20	200	26	10009
1023G	3/4"	1.63	1.58	1.58	10	100	37	10210
1024G	1"	1.81	1.89	1.89	-	20	55	10011
1025G	1-1/4"	2.19	2.38	2.38	-	20	111	10012
1026G	1-1/2"	2.31	2.83	2.83	-	10	172	10013
1027G	2"	2.44	3.29	3.29	-	10	203	10014
1028G	2-1/2"	3.19	4.08	4.08	2	10	327	10015
1029G	3"	3.31	4.67	4.67	2	10	442	10016
1030G	3-1/2"	3.50	5.07	5.07	1	5	608	10017
1031G	4"	3.75	5.75	5.75	1	5	718	10018
1005G	5"	3.69	6.88	7.50	-	1	1050	10019
1006G	6"	4.31	8.00	8.00	-	1	1250	10020