

STEEL RAIN TIGHT EMT COMPRESSION COUPLINGS

FOR EMT CONDUIT

APPLICATION

Compression style coupling used to join two lengths of E.M.T. Internal sealing rings create a raintight seal.

FEATURES

- The only steel compression fitting, UL Listed Raintight
- Unique raised bump design affords fast, positive locking of compression nuts
- Heavy steel walls
- Raintight
- Concrete tight


STANDARD MATERIALS

Steel

STANDARD FINISH

Zinc Plated

PATENTED

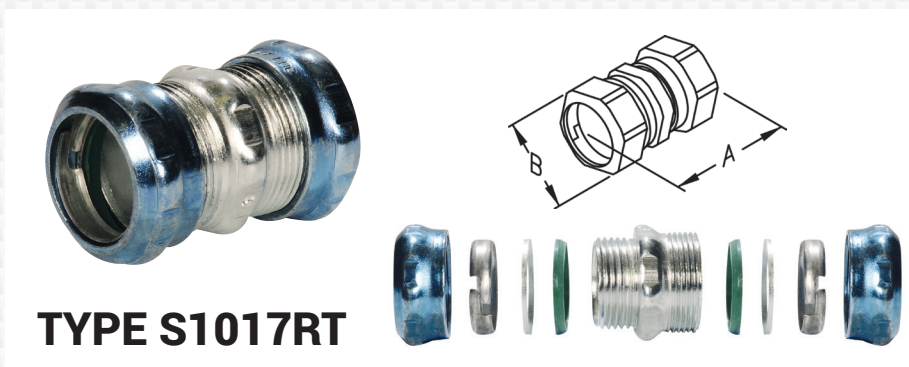

TYPE S1017RT

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC #
S1016RT	1/2"	1.60	1.12	50	500	8	62401
S1017RT	3/4"	1.60	1.39	25	250	13	62402
S1018RT	1"	1.71	1.68	50	200	20	62403
S1019RT	1-1/4"	2.08	2.06	25	100	40	62404
S1020RT	1-1/2"	2.36	2.25	10	40	58	62405
S1021RT	2"	2.40	2.78	5	20	65	62406
S1021DRT	2-1/2"	3.89	3.65	-	12	130	62407
S1021ERT	3"	4.25	4.31	-	12	140	62408
S1021E1RT	3-1/2"	4.65	4.75	-	6	217	62409
S1021FRT	4"	4.90	5.27	-	6	250	62410