

MALLEABLE IRON CORD GRIP STRAIN RELIEF CONNECTORS

COLOR CODED - 45°

APPLICATION

To secure and seal cords or cables entering enclosures or raceways.

FEATURES


- Neoprene Grommet for a moisture proof seal
- Simple installation, cord can be installed without disassembly of the fitting
- Liquidtight/Oiltight/Raintight
- Suitable for NEMA 4 enclosures and other wet locations
- Male tapered thread NPT
- Colored gripper allows for easy identification

STANDARD MATERIALS

Malleable Iron Body/Steel Gland Nut/
Neoprene Grommet

STANDARD FINISH

Zinc Plated

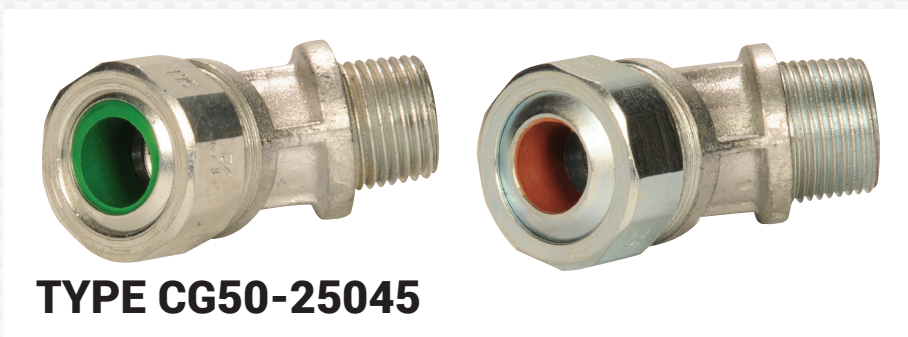

TYPE CG50-25045

CATALOG NUMBER	TRADE SIZE	COLOR	CABLE RANGE		UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC #
			MIN	MAX				
1/2"								
CG50-25045	1/2"	Red	0.15	0.25	25	100	10	86001
CG50-35045	1/2"	White	0.25	0.35	25	100	10	86002
CG50-45045	1/2"	Blue	0.34	0.45	25	100	10	86003
CG50-56045	1/2"	Green	0.45	0.56	25	100	10	86004
CG50-65045	1/2"	Brown	0.55	0.65	25	100	10	86005
3/4"								
CG75-25045	3/4"	Red	0.15	0.25	10	50	14	86101
CG75-35045	3/4"	White	0.25	0.35	10	50	14	86102
CG75-45045	3/4"	Blue	0.35	0.45	10	50	14	86103
CG75-56045	3/4"	Green	0.45	0.56	10	50	14	86104
CG75-65045	3/4"	Brown	0.55	0.65	10	50	14	86105
CG75-75045	3/4"	Yellow	0.65	0.75	10	50	14	86106
CG75-85045	3/4"	Purple	0.75	0.85	10	50	14	86107
1"								
CG100-56045	1"	Green	0.45	0.56	5	25	20	86201
CG100-65045	1"	Brown	0.50	0.65	5	25	20	86202
CG100-75045	1"	Yellow	0.65	0.75	5	25	20	86203
CG100-85045	1"	Purple	0.75	0.85	5	25	20	86204
CG100-95045	1"	Grey	0.85	0.95	5	25	20	86205
CG100-105045	1"	Black	0.95	1.05	5	25	20	86206
1-1/4"								
CG125-85045	1-1/4"	Purple	0.75	0.85	5	25	40	86301
CG125-95045	1-1/4"	Grey	0.85	0.95	5	25	40	86302
CG125-105045	1-1/4"	Black	0.95	1.05	5	25	40	86303
CG125-115045	1-1/4"	Orange	1.05	1.15	5	25	40	86304
CG125-125045	1-1/4"	Red	1.15	1.25	5	25	40	86305
CG125-137545	1-1/4"	White	1.25	1.38	5	25	40	86306
1-1/2"								
CG150-105045	1-1/2"	Black	0.95	1.05	2	10	70	86401
CG150-115045	1-1/2"	Orange	1.05	1.15	2	10	70	86402
CG150-125045	1-1/2"	Red	1.15	1.25	2	10	70	86403
CG150-137545	1-1/2"	White	1.25	1.38	2	10	70	86404

Suitable for use in Hazardous Locations under NEC 501-4(b), 502- 4(a), and 503-3(a). For Class I, Div. 2, Class II, Div. 1, 2, and Class III, Div. 1, 2.