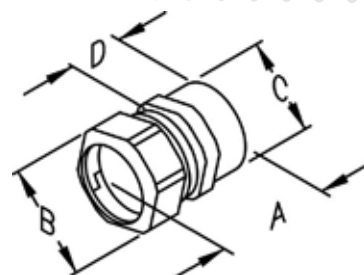


COMBINATION COUPLINGS

FOR RIGID CONDUIT, IMC AND EMT


APPLICATION:

- To join EMT to Rigid or IMC.

FEATURES:

- Threaded rigid and IMC to compression EMT.
- Concrete tight.
- NPT female hub.

STANDARD MATERIALS:

Steel

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES


UL LISTED E198258

UL Standard: UL514B


NEMA FB-1

ASTM Rated

TYPE ERC-23

**For EMT Steel Compression to
Threaded Rigid Couplings**

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
ERC-22	1/2"	1.313	1.125	0.875	0.688	25	250	14	47322
ERC-23	3/4"	1.438	1.375	1.125	0.750	25	250	25	47323
ERC-24	1"	1.500	1.688	1.375	0.813	25	250	34	47324

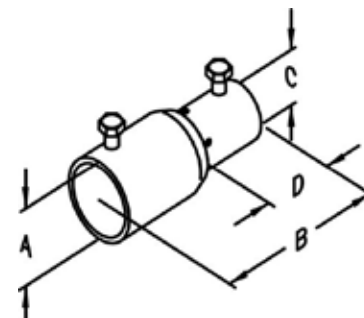
APPLICATION:

- A combination coupling to provide a transition from EMT to unthreaded rigid conduit or IMC.

FEATURES:

- Pre-set and staked Robertson head screws.
- Concrete tight when taped.

STANDARD MATERIALS:

Steel

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES


UL LISTED E198258

UL Standard: UL514B

NEMA FB-1

ASTM Rated

TYPE S18ES

**For EMT Steel Set-Screw to
Rigid Set-Screw Couplings**

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
S16ES	1/2"	1.000	2.375	0.875	0.938	50	500	14	23016
S17ES	3/4"	1.250	2.813	1.125	1.125	25	250	28	23017
S18ES	1"	1.500	3.000	1.188	1.188	—	25	36	23018