

MALLEABLE IRON/EXPLOSION PROOF GUAL AND GUAT, CONDUIT OUTLET BOXES FOR THREADED RIGID CONDUIT AND IMC



APPLICATION:

- Provides access to splice, tap or pull conductors.
- Allows connection of straight, branch and 90° bends of conduit runs.

FEATURES:

- O-ring gasket provided for NEMA 4 rating.
- Internal ground screw.
- Cast brackets on cover.
- Tapered threaded hubs.
- Explosion proof, dust-ignition proof, raintight, wet locations.

STANDARD MATERIALS:

Body: Malleable Iron
Covers: Aluminum

STANDARD FINISH:



Body: Zinc Plated

CERTIFICATIONS AND COMPLIANCES





PATENT PENDING
UL LISTED E533926
UL Standard: UL514B
NEMA FB-1
ASTM Rated

UL Listed suitable for use in the following Hazardous Locations Class I, Div 1&2, Groups A,B,C,D Class II, Div 1, Groups E,F, G
NEMA, Type 7 & 9
Explosion proof, Dust-ignition proof, Raintight, Wet Locations



TYPE GUAL50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM D	DIM E	DIM F	DIM G	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
GUAL50	1/2"	1.25	3.59	0.50	2.00	3.13	0.59	1	10	214	97200
GUAL75	3/4"	1.50	3.59	0.75	2.00	3.13	0.78	1	10	220	97205
GUAL100	1"	1.75	3.60	1.00	2.31	3.13	1.00	1	10	251	97210

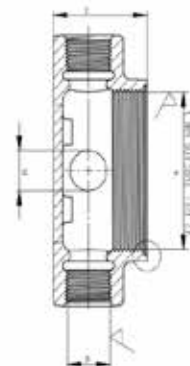

TYPE GUAT50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
GUAT50	1/2"	1.25	2.63	4.43	0.50	2.00	3.13	0.59	1	10	229	97300
GUAT75	3/4"	1.50	2.63	4.43	0.75	2.00	3.13	0.78	1	10	242	97305
GUAT100	1"	1.75	2.75	4.55	1.00	2.31	3.13	1.00	1	10	286	97310

