

MALLEABLE IRON JUNCTION CONDUIT OUTLET BOXES FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- JBDX outlet boxes are installed in threaded rigid conduit systems to:
 - Act as junction boxes.
 - Act as pull outlets.
 - Accept round base wiring devices and covers intended for use on 4" outlet boxes.
 - Mount enclosed and gasketed lighting fixtures: ARB fixture hangers.



FEATURES:

- Surface mounting; flush mounting can be obtained by nailing box to concrete form through mounting lugs.
- Drilled mounting lugs.
- Four drilled and tapped conduit bosses spaced 90° apart on sides.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Zinc Plated

OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add Suffix "G" to Malleable Iron catalog number. Example JBDX-75G. For more information see page 8.

CERTIFICATIONS AND COMPLIANCE




UL Standard: UL514B
NEMA FB-1
ASTM Rated

TYPE JBDX-75

For Threaded Rigid Conduit and IMC

CATALOG NUMBER	TRADE SIZE	INSIDE DEPTH	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
JBDX-50	1/2"	2.06	4.563	5.55	6.125	1	5	315	89230
JBDX-75	3/4"	2.06	4.563	5.55	6.125	1	5	305	89235
JBDX-100	1"	2.06	4.563	5.55	6.125	1	5	285	89240

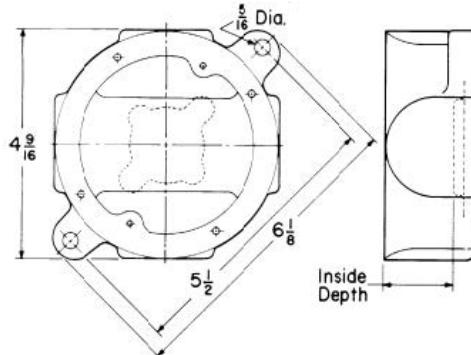

MALLEABLE IRON JUNCTION CONDUIT OUTLET BOX COVERS AND GASKET

APPLICATION:

- Furnished with screws.
- When used with gasket, provides raintight fit.

STANDARD MATERIALS:

Cover: Malleable Iron

Gasket: Neoprene

STANDARD FINISH:

Zinc Plated

OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add Suffix "G" to Malleable Iron catalog number. Example JBKG. For more information see page 8.

CERTIFICATIONS AND COMPLIANCE



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



CATALOG NUMBER	TYPE	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
JBKB	BLANK	5	50	90	89245
JBDXG	GASKET	20	200	5	89250