

MALLEABLE IRON/HOT DIPPED GALVANIZED FDT AND FDCT DEVICE BOXES—SINGLE GANG FOR THREADED RIGID CONDUIT AND IMC



APPLICATION:

- Accommodates wiring devices and provides opening to splice, tap or pull conductors.

FEATURES:

- Tapered threaded hubs (NPT) with integral bushing.
- Internal grounding screw.
- Suitable for use in wet locations when used with gasketed covers.
- Surface mounting lugs.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated




OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove the “G” suffix from Hot Dipped Galvanized catalog number and see page 74.

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated

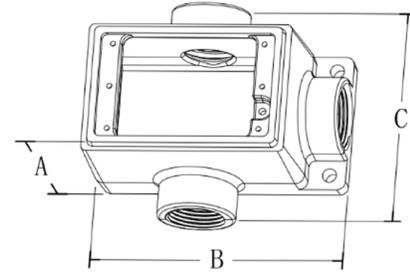

TYPE FDT-50G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
FDT-50G	1/2"	2.90	5.31	4.59	1	10	300	89202
FDT-75G	3/4"	2.90	5.31	4.59	1	10	310	89207
FDT-100G	1"	2.90	5.31	4.59	1	10	310	89212

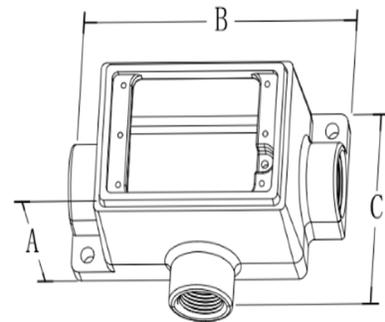

TYPE FDCT-50G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
FDCT-50G	1/2"	2.90	6.12	3.78	1	10	300	89217
FDCT-75G	3/4"	2.90	6.12	3.78	1	10	310	89222
FDCT-100G	1"	2.90	6.12	3.78	1	10	310	89225