

MALLEABLE IRON/**HOT DIPPED GALVANIZED** FS AND FD DOUBLE GANG DEVICE BOXES FOR THREADED RIGID CONDUIT AND IMC



APPLICATION:

- Accommodates wiring devices and provides opening to splice, tap or pull conductors.

FEATURES:

- Tapered threaded hubs (NPT) with integral bushing.
- Two internal grounding screws.
- Suitable for use in wet locations when used with gasketed covers.
- Surface mounting lugs.

STANDARD MATERIALS:

Body: Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated




OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove the "G" suffix from Hot Dipped Galvanized catalog number and see page 77.

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated

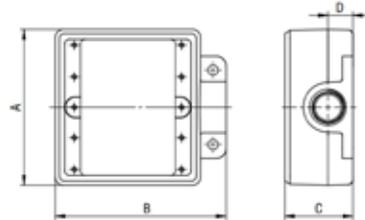

TYPE FS2-50G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
FS2-50G	1/2"	5.125	5.625	2.063	1	10	297	54106
FS2-75G	3/4"	5.125	5.625	2.063	1	10	300	54107
FS2-100G	1"	5.125	5.625	2.063	1	10	317	54108
FD2-50G	1/2"	5.125	5.625	2.875	1	10	369	54100
FD2-75G	3/4"	5.125	5.625	2.875	1	10	375	54101
FD2-100G	1"	5.125	5.625	2.875	1	10	376	54102

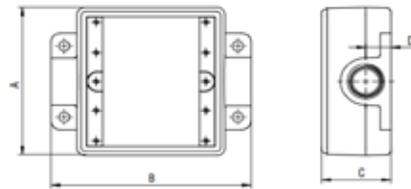

TYPE FSC2-50G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
FSC2-50G	1/2"	5.938	5.625	2.063	1	10	302	54109
FSC2-75G	3/4"	5.938	5.625	2.063	1	10	315	54110
FSC2-100G	1"	5.938	5.625	2.063	1	10	335	54111
FDC2-50G	1/2"	5.938	5.625	2.875	1	10	405	54103
FDC2-75G	3/4"	5.938	5.625	2.875	1	10	415	54104
FDC2-100G	1"	5.938	5.625	2.875	1	10	418	54105