

# ALUMINUM MOGULS WITH COVER AND GASKET

## FOR THREADED RIGID CONDUIT AND IMC



### APPLICATION:

- Larger body size facilitates pull of large and heavy conductors. Specially designed raised covers provide additional wiring area.
- SEPCO Moguls are used for pulling straight, 45° or 90° angle turns and/or making taps and splices.

### FEATURES:

- Smooth, rounded integral bushing in each hub protects conductor insulation.
- Accurately tapped, tapered threads for tight, rigid joints and ground continuity.
- Lightweight aluminum facilitates shipping, handling, and installing.


### STANDARD MATERIALS:

**Bodies and Covers:** Aluminum

**Gaskets:** Fiber 1-1/4"-2",

Neoprene 2-1/2"-4"

**Screws:** Stainless Steel

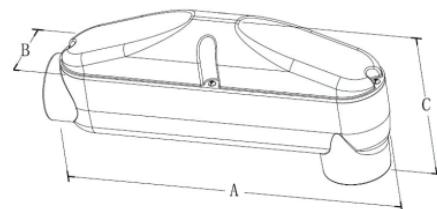

### TYPE MLB400A

CATALOG NUMBER	TRADE SIZE	MAX WIRE SIZE	VOL. CU.IN.	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
MLB125A	1-1/4"	3 #1/0 AWG	40.00	9.49	2.52	3.66	—	1	375	12811
MLB150A	1-1/2"	3 #3/0 AWG	128.00	14.53	3.23	5.18	—	1	425	12812
MLB200A	2"	3 #300 MCM	128.00	14.53	3.23	5.18	—	1	425	12813
MLB250A	2-1/2"	3 #400 MCM	547.00	22.80	4.73	8.77	—	1	1089	12814
MLB300A	3"	3 #500 MCM	547.00	22.80	4.73	8.77	—	1	976	12815
MLB350A	3-1/2"	3 #750 MCM	1051.00	29.19	5.75	10.14	—	1	1556	12816
MLB400A	4"	3 #1000 MCM	1051.00	29.19	5.75	10.14	—	1	1463	12817

### STANDARD FINISH:

Aluminum Enameled

### CERTIFICATIONS AND COMPLIANCES



**UL Listed: E198259**  
UL Standard: UL514B  
NEMA FB-1  
ASTM Rated