

CONDUIT BEAM CLAMPS

FOR THREADED RIGID CONDUIT

APPLICATION

Provides support for conduit hanging systems.

FEATURES


- Steel bolt - case hardened
- Standard Sizes 1"-2 1/2"
Jaw Opening 3/4"-1 1/4"

STANDARD MATERIALS

Malleable Iron/Steel Bolt-Case Hardened

STANDARD FINISH

Zinc Plated

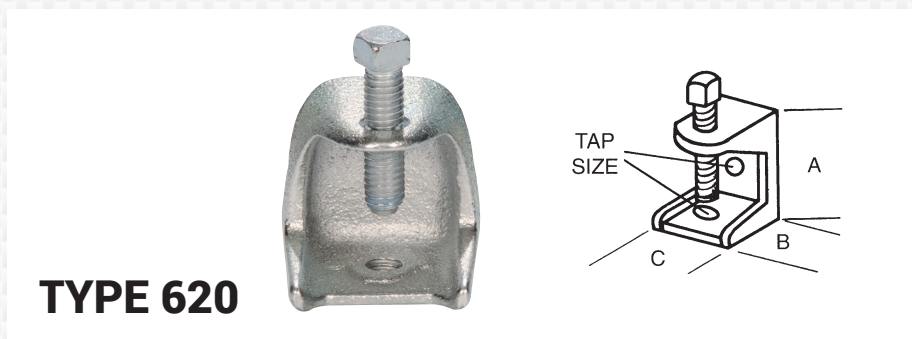

TYPE 620

CATALOG NUMBER	TRADE SIZE	TAP SIZE	JAW OPENING	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC #
620	1"	1/4" - 20"	0.750	1.125	1.400	1.385	25	250	22	16201
621	1"	3/8" - 16"	0.750	1.125	1.400	1.385	25	250	22	16211
625	2"	3/8" - 16"	0.875	1.990	1.755	1.885	-	50	90	16251
626	2"	1/2" - 13"	0.875	1.990	1.755	1.885	-	25	90	16261
627	2-1/2"	1/2" - 13"	1.250	2.530	2.140	2.500	-	25	160	16271

Loading Capacity

CATALOG NUMBER	TRADE SIZE	WORKING LOAD	TEST LOAD FOR 5 MIN.
620	1"	250 LBS	750 LBS
621	1"	250 LBS	750 LBS
625	2"	500 LBS	1500 LBS
626	2"	500 LBS	1500 LBS
627	2-1/2"	500 LBS	1500 LBS

APPLICATION

Clamp on to structure member to provide mounting means for the attachment of conduit hangers either directly or by means of threaded rod.

STANDARD MATERIALS

- Steel

STANDARD FINISH

Zinc Plated



TYPE S620

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC #
S620	1/4" - 20"	0.920	1.400	1.625	25	250	15	16207