

BIG BITE SADDLE-TYPE COMBINATION COUPLINGS

FOR ARMORED CABLE, METAL CLAD AND FLEXIBLE METALLIC CONDUIT

APPLICATION:

- To connect Flex, AC and MCI cables to EMT conduit.

FEATURES:

- One-piece tubular construction affording extra strength.
- Dual-gripping saddle clamps.
- Saddle clamp rides up and down on screw for ease installation.
- Robertson head screws.

STANDARD MATERIALS:

Tubular Steel/ Steel Locknuts/Steel Compression Nut/Steel Gland Ring

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES




UL LISTED

E198258 1/2" thru 3/4"

UL Standard: UL514B

NEMA FB-1

ASTM Rated



TYPE DBC-50

Compression

CATALOG NUMBER	TRADE SIZE	CABLE OPENING MAX	CABLE OPENING MIN	KO SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
DBC-38	3/8"	0.640	0.280	1/2"	1.375	1.250	50	500	18	99910
DBC-50	1/2"	0.930	0.635	1/2"	1.563	1.250	25	100	19	99911
DBC-75	3/4"	1.125	0.810	3/4"	1.563	1.438	10	100	20	99912

APPLICATION:

- To connect Flex, AC and MCI cables to EMT conduit.

FEATURES:

- One-piece tubular construction affording extra strength.
- Dual-gripping saddle clamps.
- Saddle clamp rides up and down on screw for ease installation.
- Robertson head screws.

STANDARD MATERIALS:

Tubular Steel

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES




UL LISTED

E198258 1/2" thru 3/4"

UL Standard: UL514B

NEMA FB-1

ASTM Rated

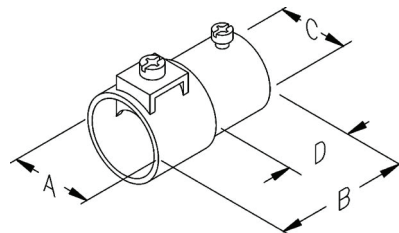

TYPE DBS-50

Set-Screw

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
DBS-38	3/8"	0.750	1.563	0.875	0.625	50	500	18	90128
DBS-50	1/2"	1.063	2.000	0.875	0.625	25	100	19	90129
DBS-75	3/4"	1.250	2.125	1.125	0.813	10	100	20	90130

