

MALLEABLE IRON/HOT DIPPED GALVANIZED THREADED CONDUIT BODIES

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION

To provide access to conductors for pulling, splicing, and maintenance. Threaded for rigid conduit and IMC.

FEATURES

- Exclusive built-in rollers facilitate cable pulling from sizes 1 1/4" - 4"
- Tapered threaded hubs (NPT)
- Flat back design for easy mounting close to walls
- Suitable for use in concrete

STANDARD MATERIALS

Malleable Iron

STANDARD FINISH


Hot Dipped Galvanized/Zinc Plated

OPTIONAL FINISH

For Malleable Iron / Zinc Plated, please remove suffix 'G' from Hot Dipped Galvanized Catalog Number and see page 37.



New Product



TYPE T1G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC #
T Type										
T1G	1/2"	5.375	2.063	1.313	N/A	6.00	10	50	111	10182
T2G	3/4"	6.000	2.250	1.500	3 #6 AWG	9.50	10	50	137	10183
T3G	1"	7.063	2.625	1.813	3 #4 AWG	15.00	5	25	195	10184
T4G	1-1/4"	9.000	2.750	2.625	3 #2 AWG	33.00	—	10	332	10185
T5G	1-1/2"	9.000	3.500	2.625	3 #1/0 AWG	36.00	—	10	368	10186
T6G	2"	11.500	4.125	3.125	3 #1/0 AWG	75.00	—	5	663	10187
T7G	2-1/2"	15.000	5.688	4.313	3 #4/0 AWG	138.00	—	1	1271	10204
T8G	3"	15.125	5.875	4.313	3 #4/0 AWG	170.00	—	1	1547	10205
T9G	3-1/2"	18.125	6.813	4.875	3 #350 MCM	300.00	—	1	2542	10206
T10G	4"	18.125	7.188	4.875	3 #350 MCM	328.00	—	1	2542	10207

MALLEABLE IRON/HOT DIPPED GALVANIZED CONDUIT BODY COVERS

APPLICATION

Used with conduit bodies to cover opening.

FEATURES

- Supplied with Stainless Steel captive screws
- Sizes 2 1/2" thru 4" with raised dome affords additional wiring room

STANDARD MATERIALS


Malleable Iron

STANDARD FINISH

Hot Dipped Galvanized/Zinc Plated



New Product

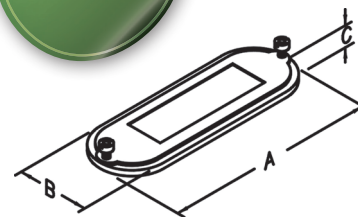

TYPE 01MG

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC #
01MG	1/2"	3.936	1.313	0.063	25	250	23	70224
02MG	3/4"	4.625	1.500	0.063	25	250	31	70225
03MG	1"	5.313	1.750	0.063	20	200	41	70226
04MG	1-1/4" - 1-1/2"	7.188	2.500	0.250	25	100	91	70227
05MG	2"	9.500	3.188	0.313	-	25	208	70228
06MG	2-1/2" - 3"	12.125	4.313	1.063	-	10	358	70229
07MG	3-1/2" - 4"	14.875	5.625	1.125	-	10	550	70230