

MALLEABLE IRON/HOT DIPPED GALVANIZED EXPLOSION PROOF GUAL AND GUAT CONDUIT OUTLET BOXES

FOR THREADED RIGID CONDUIT AND IMC





APPLICATION:

- Provides access to splice, tap or pull conductors.
- Allows connection of straight, branch, and 90° bends of conduit runs.

FEATURES:

- O-ring gasket provided for NEMA 4 rating.
- Internal ground screw.
- Cast brackets on cover.
- Tapered threaded hubs.
- UL Listed suitable for use in the following Hazardous Locations;
 - Class I, Div 1&2, Groups A,B,C
 - Class II, Div 1, Groups E,F,G NEMA, Type 7 & 9
- Explosionproof, Dust-ignition proof, Raintight, Wet Locations.

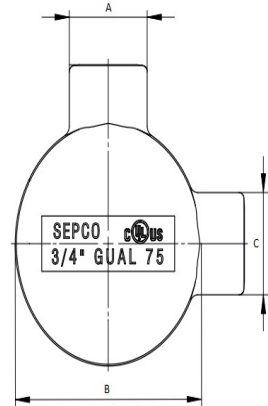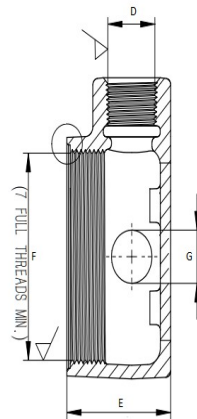



STANDARD MATERIALS:

Body: Malleable Iron
Covers: Aluminum

STANDARD FINISH:

Body: Hot Dipped Galvanized & Zinc Plating

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	UNIT PACK	MASTER PACK	WEIGHT (LBS.) PER 100 PCS
GUAL50	1/2"	1.25	2.63	3.59	0.50	2.00	3.13	0.59	1	10	214
GUAL75	3/4"	1.50	2.63	3.59	0.75	2.00	3.13	0.78	1	10	220
GUAL100	1"	1.75	2.63	3.60	1.00	2.31	3.13	1.00	1	10	251

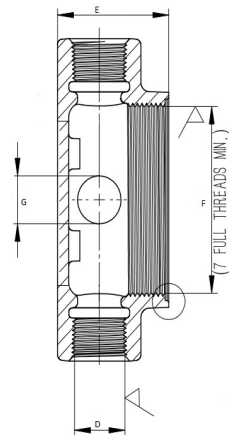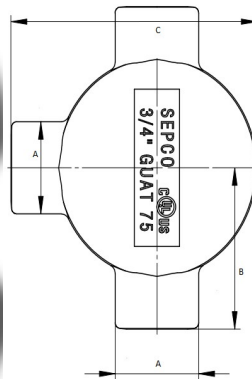

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	UNIT PACK	MASTER PACK	WEIGHT (LBS.) PER 100 PCS
GUAT50	1/2"	1.25	2.63	3.59	0.50	2.00	3.13	0.59	1	10	229
GUAT75	3/4"	1.50	2.63	3.59	0.75	2.00	3.13	0.78	1	10	242
GUAT100	1"	1.75	2.63	3.60	1.00	2.31	3.13	1.00	1	10	286